



SEP ELECTRONIC CORP.

# 1N5817 thru 1N5819



## 1.0 A Schottky Barrier Rectifier Rectifier Reverse Voltage 20,30,40V

### Features

- Extremely low VF
- Epitaxial construction
- Low power loss, high efficiency
- Low stored charge, majority carrier construction
- Plastic material has UL flammability classification 94V-0

### Mechanical Data

Case: Molded plastic


Terminals: Solder plated solderable per MIL-STD-202,  
Method 208

Polarity: Cathode band

Mounting Position: Any

Weight: 0.34 grams (approx)

DO-41

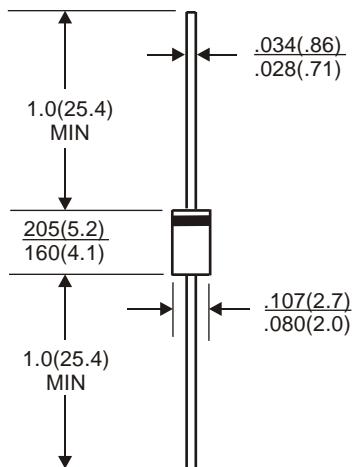

All dimensions inches and (millimeters)

### Maximum Ratings & Thermal Characteristics

Rating at 25°C ambient temperature unless otherwise specified, Resistive or Inductive load, 60 Hz.  
For Capacitive load derate current by 20%.

Parameter	Symbol	1N5817	1N5818	1N5819	unit
Maximum recurrent peak reverse voltage	VRRM	20	30	40	V
Maximum RMS voltage	VRMS	14	21	28	V
Maximum DC blocking voltage	VDC	20	30	40	V
Maximum average forward rectified current 9.5 mm lead length (see fig.1) at TL=90°C	IF(AV)		1.0		A
Peak forward surge current, single sine-wave superimposed on rated load (JEDEC Method)	IFSM		25		A
Typical thermal resistance	ReJA		50		°C/W
Typical junction capacitance	Cj		110		pF
Operating junction	TJ		-55 to + 125		°C
Storage temperature range	TSTG		-55 to + 125		°C


### Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified. Resistive or Inductive load, 60Hz.  
For Capacitive load derate by 20 %.


Parameter	Symbol	1N5817	1N5818	1N5819	Unit
Maximum instantaneous forward voltage drop at 1.0A	VF	0.45	0.55	0.60	V
Maximum DC reverse current at rated TA =25°C DC blocking voltage per element TA =100°C	IR		1.0 10.0		mA

**Rating and Characteristic Curves** (  $T_A=25^\circ\text{C}$  Unless otherwise noted )  
**1N5817 thru 1N5819**


**Fig. 1 Forward Current Derating Curve**

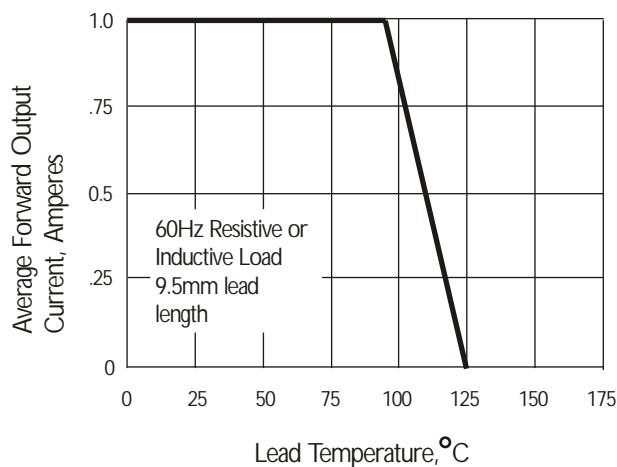


**Fig. 2 Typical Instantaneous Forward Characteristics**

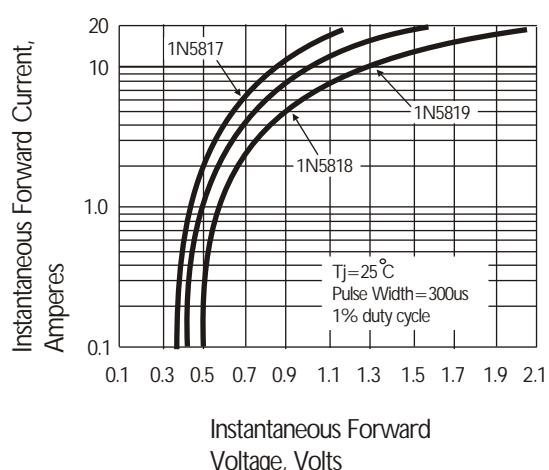

**Fig. 3 Typical Reverse Characteristics**

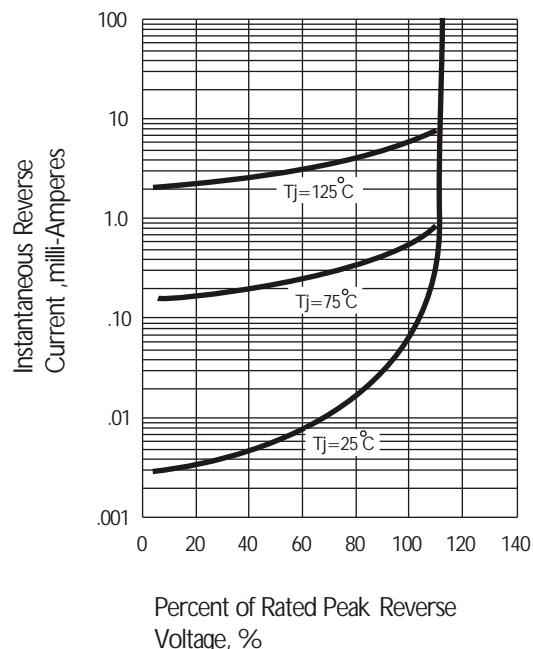

**Fig. 4 Maximum Non-repetitive Forward Surge Current**

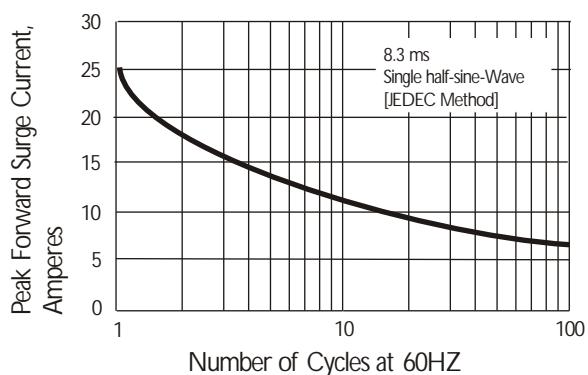

**Fig. 5 Typical Junction Capacitance**

